



www.egcaraudio.com

EG-D1NM-PH-V2

Driver **4000W** Double Voice

- ⚡ 4000 Watts Max Power Handling
- 🔊 3.5" Inch Dual Voice Coil IN/OUT
- 📈 123 dB Sensitivity
- 📡 200 - 9.000 Hz of Frequency Range






GENERAL SPECIFICATIONS:

Max Music Power	4000 W
RMS Power Handling	500 WATTS X2
Frequency Response	200 Hz- 9KH
Nominal Impedance	8 OHM
Sensitivity	125 dB
Magnet	Neodymium
Voice Coil	2 x 3.5" CCAW Kapton
Diaphragm Material	Polyester
Throat Diameter	2" (50.8mm)
Replacement Diaphragm	EG-D1NM-PH-KIT

MOUNTING INFO

Overall Diameter	5.2" (132mm)
Overall Depth	4.17" (106mm)
Mounting Bolt Circle	4" (101.6mm)

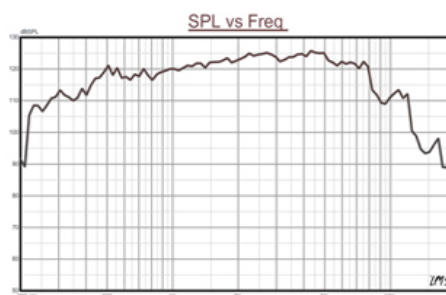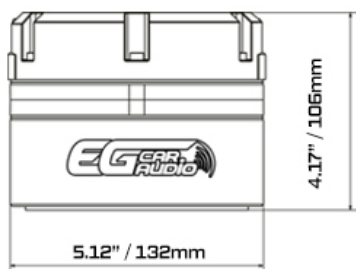

📺 @EGCARAUDIO 📷

Designed and Engineered in USA. Made in China